

DS030
MADE
in ITALY





# *DS030*

Le *DS030* sono barre a led di piccole dimensioni con scocca in alluminio caratterizzate da un'efficienza dei led estremamente elevata (circa 200lm/watt). IL DOPPIO DELLA LUMINOSITA' A PARITA' DI CONSUMO.
Le DS030 sono una fonte di illuminazione lineare adatta per una molteplicità di utilizzi sia per interni che esterni (se IP66). La DS030 è disponibile di base nelle lunghezze di 60 e 120cm, ma sono anche realizzabili a richiesa nelle dimensioni desiderate, in modo da adattarsi pefettamente ad ogni tipo di esigenza. Il montaggio può essere a incasso, a plafone oppure a sospensione. Una delle caratteristiche principali delle DS030 sta nel fatto che la luce risulta essere omogenea lungo tutta la superficie della barra, non ci sono buchi o distanze eccessive tra un LED e l'altro che in barre a LED commerciali a basso costo spesso risultano frequenti e molto fastidiosi. Il risultato è la completa eliminazione dei coni d'ombra e un'illuminazione come quella dei neon.


*The DS030 LED bars are small in size with aluminum body characterized by an extremely high efficiency of the LEDs (about 200lm / watt). DOUBLE THE BRIGHT 'EQUAL' CONSUMPTION.*
*The DS030 is a linear light source suitable for a variety of uses for both internal and external (if IP66). The DS030 is available as standard in lengths of 60 and 120cm, but are also made to measure the desired size, so they fit perfectly to every need. The assembly can be recessed, surface-mounted or suspended. One of the main features of the DS030 lies in the fact that the light appears to be homogeneous along the whole surface of the bar, there are no holes or excessive distances between an LED and the other LED bars in low-cost commercial are often frequent and very annoying. The result is the complete elimination of the cones of shadow and illumination as that of neon.*

| Modello<br>Item | W<br>W | Int. luminosa<br>Lumen | nr. LED<br>nr. LED | Kg<br>Kg |
|---|---|---|---|---|
| **DS030_136** | 13,6 | 2620lm | 36 | 0,30kg |
| **DS030_136_V2** | 25,5 | 4550lm | 72 | 0,40kg |
| **DS030_236** | 25,5 | 4550lm | 72 | 0,40kg |
| **DS030_236_V2** | 40 | 7200lm | 144 | 0,70kg |
| **DS030_158** | 30 | 5400lm | 108 | 0,60kg |
| **DS030_158_V2** | 60 | 10800lm | 216 | 1,20kg |
| **DS030_258** | 40 | 7200lm | 144 | 0,70kg |

Colori Struttura disponibile
Body Colours available

Grigio
Grey

FOTOMETRICA
Photometric




Sul mercato sono disponibili moltissimi profili in alluminio che utilizzano strisce flessibili a led di importazione che nella loro massima espressione luminosa risultano adatte ad un uso decorativo, mentre con le DS030 a parità di assorbimento si può illuminare come una plafoniera.
The market offers many aluminum profiles that use LED flexible strips of import in their maximum luminous expression are suitable for decorative use, while with the DS030 same absorption can be illuminated as a ceiling light.

**Norme di riferimento:** EN 60598-1, EN62471, EN55015, EN61547, EN61000-3-2, EN61000-3-3, UNI EN 12464-1.
**Direttive:** 2011/65/CE, 2006/95/CE, 2004/108/CE. Conforme al gruppo di rischio esente RG=0, norma IEC 62471.
**Reference standards:** EN 60598-1, EN62471, EN55015, EN61547, EN61000-3-2, EN61000-3-3, UNI EN 12464-1
**Guidelines:** 2011/65/CE, 2006/95/CE, 2004/108/CE. Conforms to the group of risk-free RG=0, IEC 62471.


IK08

* Tale valore può subire delle variazione senza preavviso, pertanto vi invitamo a chiedere conferma in fase di ordine.
** +/- 5%.

# DS030

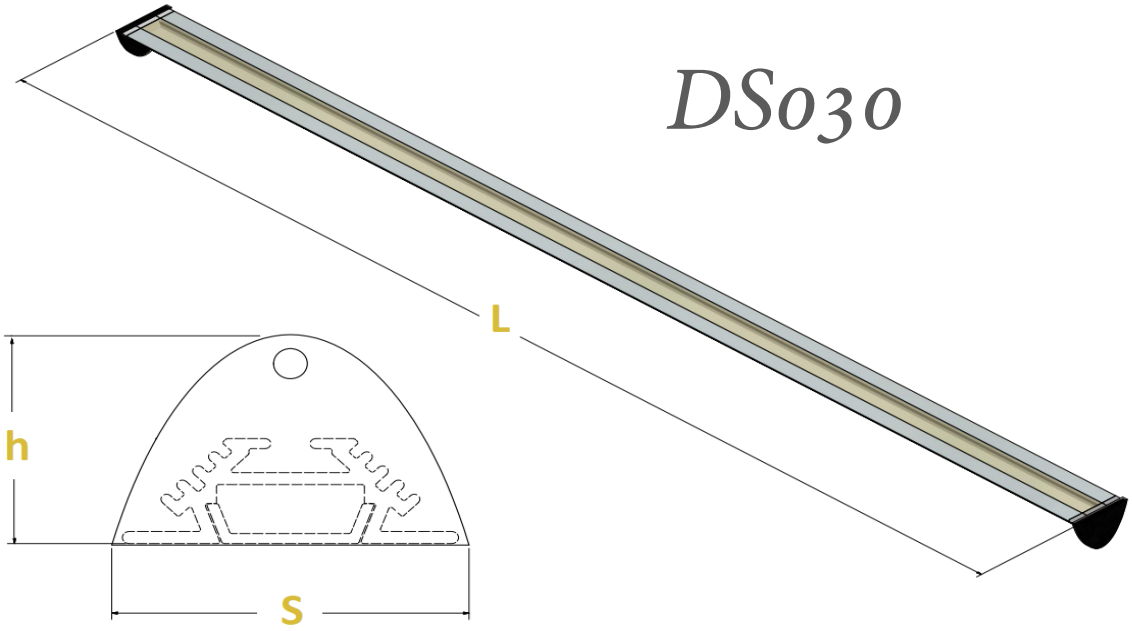


# DS030_ V2

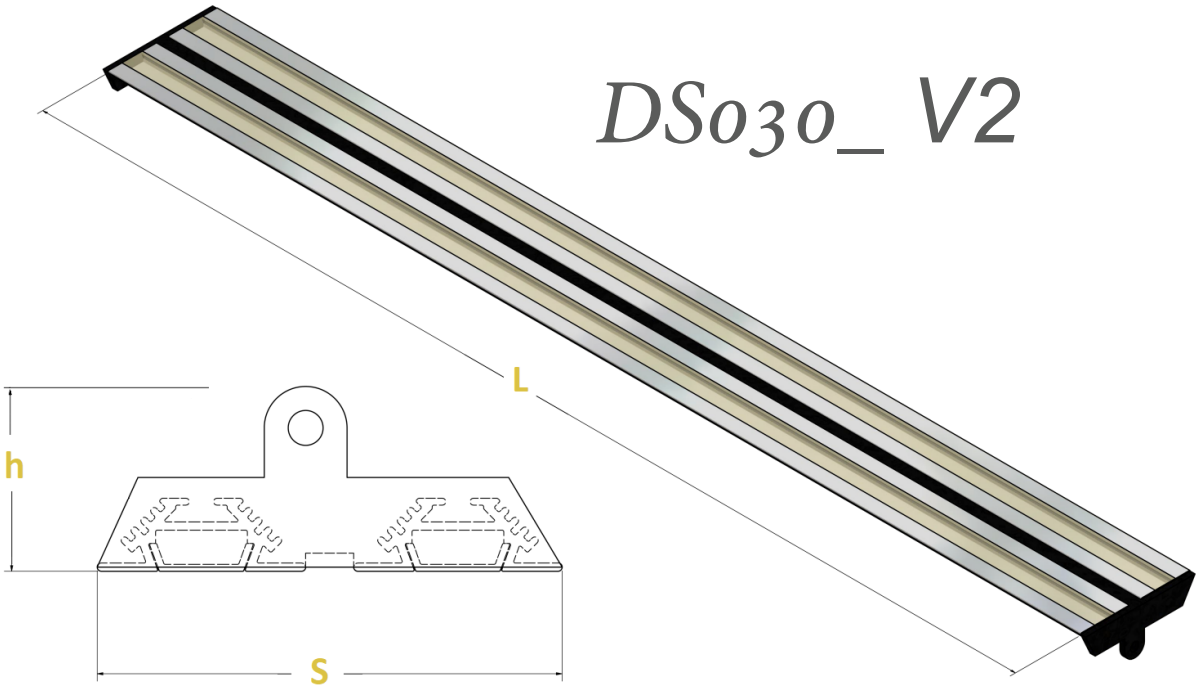


| Modello<br>Item | Dimensioni<br>(S x L x h) |
|---|---|
| **DS030_136** | 35x40x400mm |
| **DS030_136_V2** | 70x70x400mm |
| **DS030_236** | 35x40x760mm |
| **DS030_236_V2** | 70x70x760mm |
| **DS030_158** | 35x40x1150mm |
| **DS030_158_V2** | 70x70x1150mm |
| **DS030_258** | 35x40x1520mm |

